

### APPLICATION

Power pack is intended to supply hydraulic system with hydraulic fluid (oil) according to the required parameters (pressure and displacement).

### DESCRIPTION

Power pack in standard consists of the oil tank and the key accessories such as:

- drain breather filter used also as the oil filler
- oil level indicator (optical)
- oil drain plug
- magnetic plug

and of pumping unit (electric motor - gear pump), oil filter (low pressure filter), and also measuring block with pressure gauge switch, pressure gauge and output connections.

Standard version of the power pack can be extended (upon customer request) with:

- hydraulic control system – according to individual scheme;
- other equipment and hydraulic machines, which are not included in the data card, after prior consultation with the manufacturer
- electric control system

The extension of hydraulic system can be made:

- on the blocks for column mounting (**WK560 520**) – standard version
- on multi-station manifold blocks type **ULRA 6...** (**WK 450 499**)

Power pack is usually used for short - time operation. When the power pack is applied to continuous running under load, outside cooling system must be used.


### TECHNICAL DATA (table1)

|   |                                  |                                 |                                 |
|---|----------------------------------|---------------------------------|---------------------------------|
| Nominal oil tank capacity   | 12 dm <sup>3</sup>               |                                 |                                 |
| Oil capacity difference corresponding to oil level difference max - min | up to 3,5 dm <sup>3</sup>        |                                 |                                 |
| Hydraulic fluid   | mineral oil                      |                                 |                                 |
| Operating temperature range   | - 10 up to + 70 °C               |                                 |                                 |
| Standard filtration   | 16µm                             |                                 |                                 |
| Viscosity   | 10 ÷ 380 mm <sup>2</sup> /s      |                                 |                                 |
| Motor supply voltage  | 230/400V 50Hz (other, if agreed) |                                 |                                 |
| Type of pump  | 10C1X053G                        | 10C1,6X053G                     | 10C2,5X053G                     |
| Operating pressure  | up to 20 MPa                     | up to 20 MPa                    | up to 20 MPa                    |
| Displacement  | 1cm <sup>3</sup> /revolution     | 1,6 cm <sup>3</sup> /revolution | 2,5 cm <sup>3</sup> /revolution |

# HYDRAULIC SCHEME

Connections (table 2)


| Port                | P     | T     | A     | B     |
|---------------------|-------|-------|-------|-------|
| Connections for NS6 | G1/2" | G1/2" | G1/2" | G1/2" |

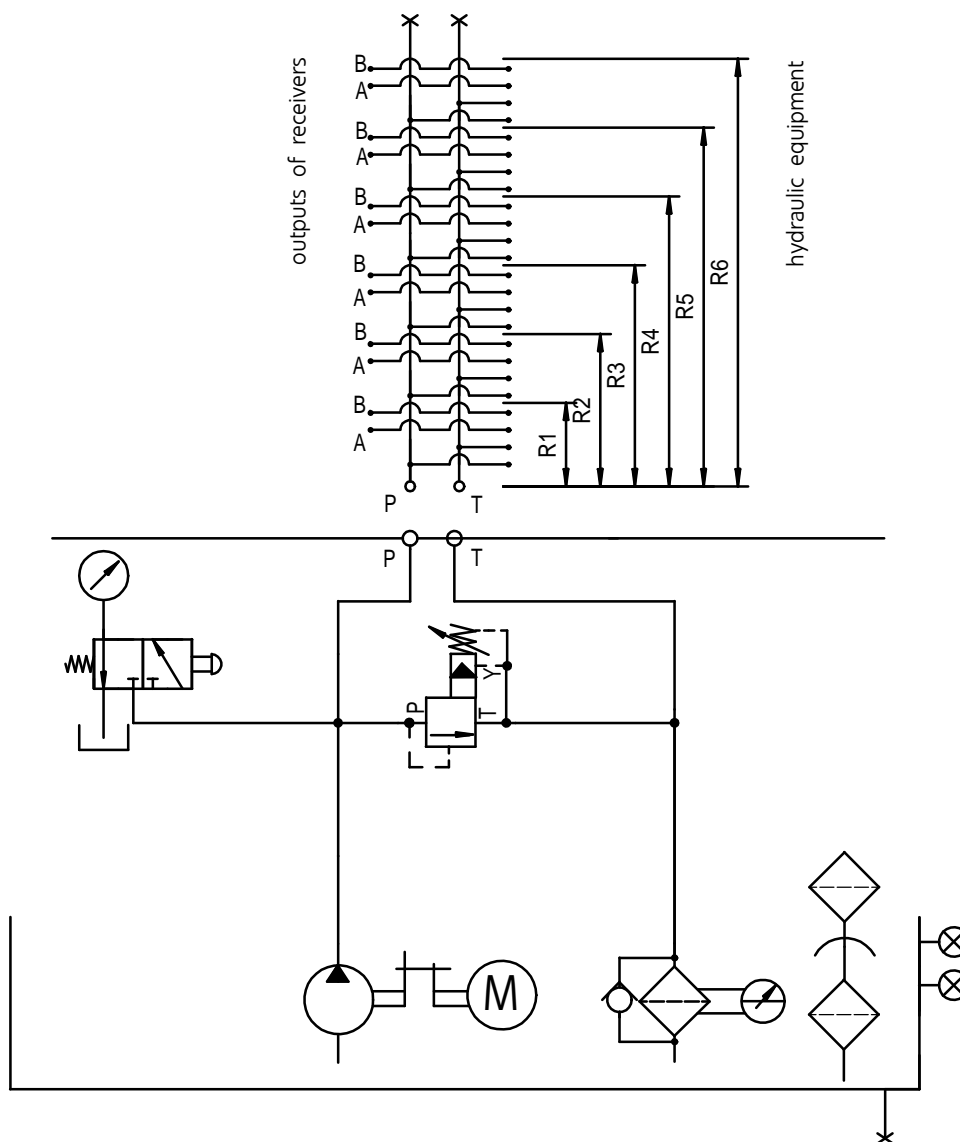

Operating pressure range depending on the motor power and type of pump (table 3)

| Motor type    | Power [kW] | 10C1X016G      | 10C1,6X016G    | 10C2,5X053G    |
|---------------|------------|----------------|----------------|----------------|
|               |            | pressure [MPa] | pressure [MPa] | pressure [MPa] |
| SKg 71- 4B    | 0,37       | 9              | 6              | -              |
| SKg 80- 4A    | 0,55       | 16             | 9              | 7              |
| SKg 80- 4B    | 0,75       | 20             | 12,5           | 9              |
| STKg 80-X- 4C | 1,1        | -              | 18             | 13,5           |

## OVERALL AND CONNECTION DIMENSIONS

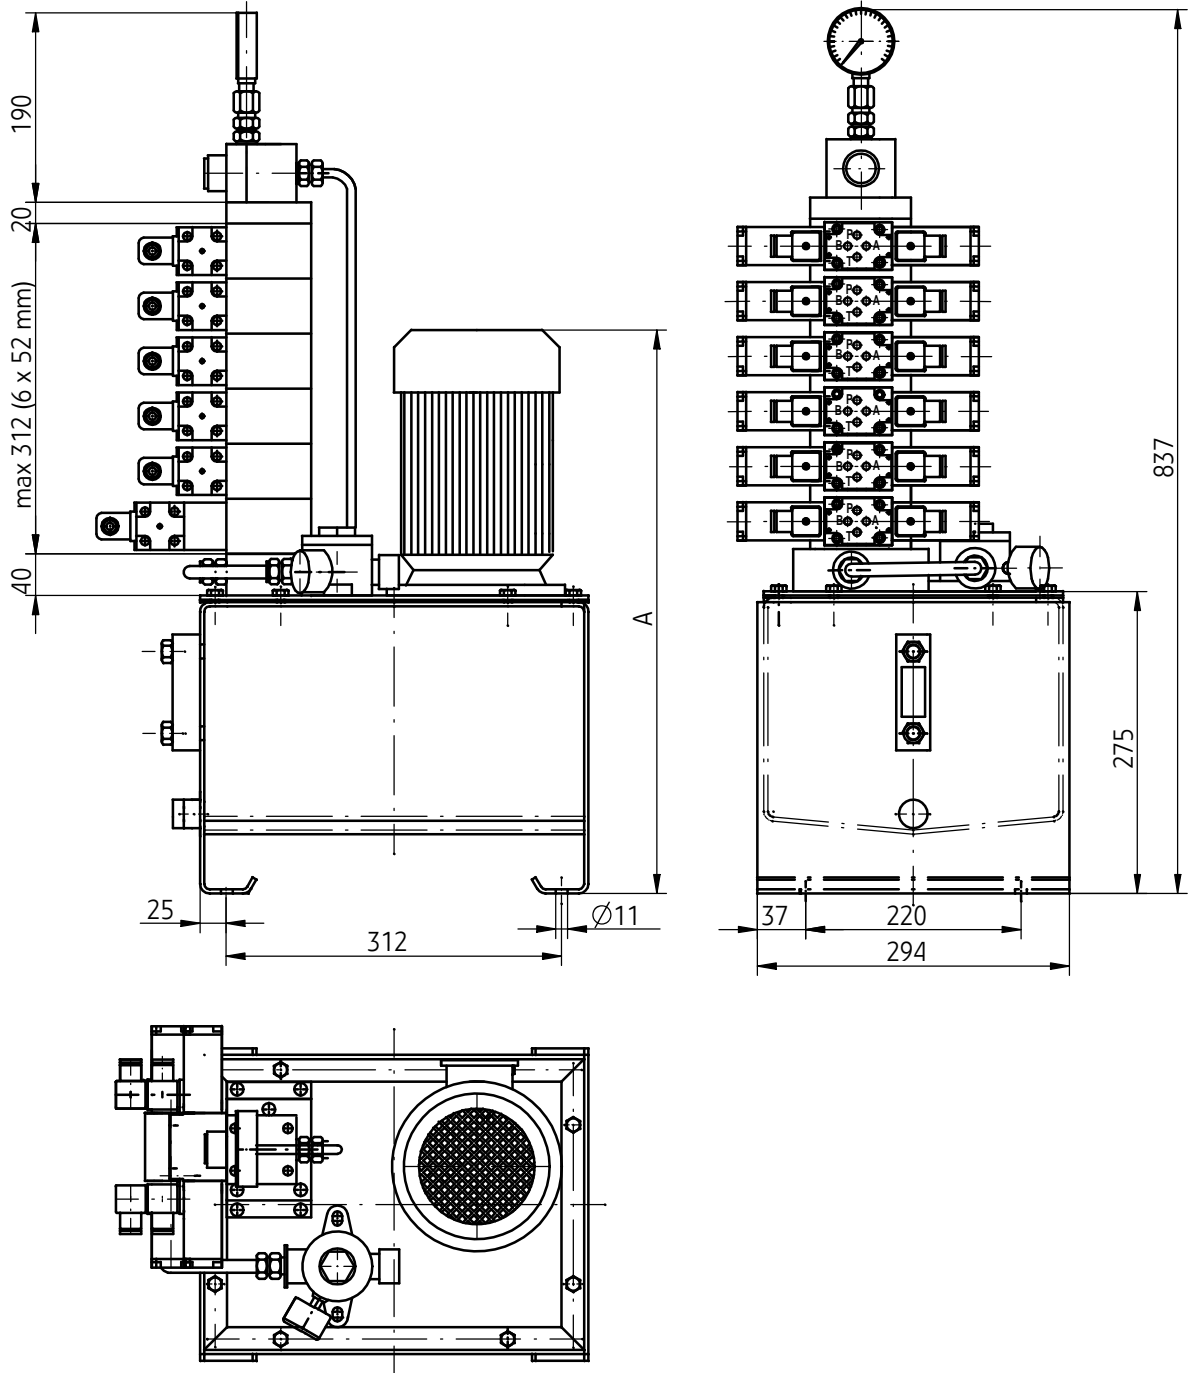

Overall dimensions depending on the motor power and type of pump (table 4)

| Motor type             | Dimension | 10C1,6X053G | 10C1,6X053G | 10C2,2X053G |
|------------------------|-----------|-------------|-------------|-------------|
| SKg 71- 4B 0,37 [kW]   | A         | 511         | -           | -           |
| SKg 80- 4A 0,55 [kW]   | A         | 526         | 526         | 526         |
| SKg 80- 4B 0,75 [kW]   | A         | 543         | 543         | 543         |
| STKg 80 X- 4C 1,1 [kW] | A         | -           | 570         | 570         |


## ADDITIONAL

When selecting power pack to the machine it is necessary to consider its total heat balance by specifying oil temperature in the tank – it should not exceed 55°C (328 K).

If necessary, oil cooler must be used for the hydraulic system. Thermal power output of the power pack tank to the environment can be estimated using below formula or diagram.

$$N_{\text{output}} = k \times A \times \Delta T$$

- $N_{\text{output}}$  [ W ] - thermal power output of the tank  
 $A$  [ m<sup>2</sup> ] - active surface area of the tank for the power pack tank UHMZ 12  $A = 0,45 \text{ m}^2$   
 $k$  [ W/m<sup>2</sup> × K ] - heat exchange factor
- $k = 5 \text{ W/m}^2 \times \text{K}$  - when poor air circulation, unfavourable location,
  - $k = 10 \text{ W/m}^2 \times \text{K}$  - normal air circulation from all directions,
  - $k = 20 \text{ W/m}^2 \times \text{K}$  - when intensive air circulation (unnaturally forced),
- $\Delta T$  [ K ] - temperature difference between the tank (oil) and the environment

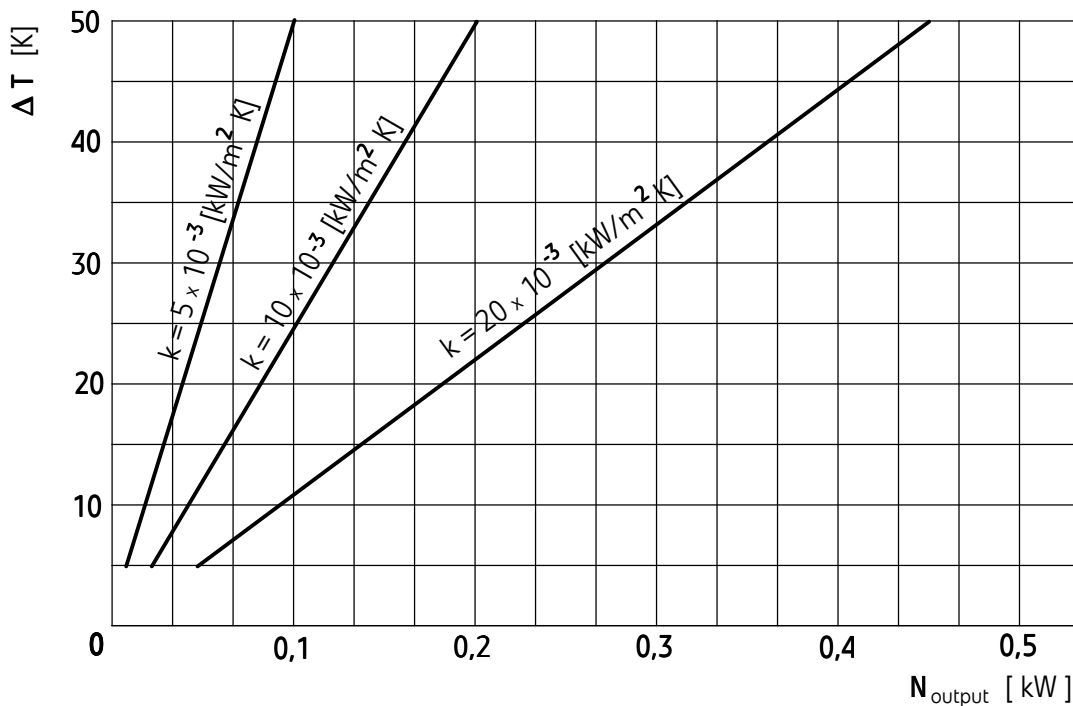

Thermal power output of the power pack tank UHMZ 12

## HOW TO ORDER

Any order should be addressed to the manufacturer according to the below coding.

|             |           |   |   |   |   |   |   |   |
|-------------|-----------|---|---|---|---|---|---|---|
| <b>UHMZ</b> | <b>12</b> | + | + | + | + | + | + | ★ |
|-------------|-----------|---|---|---|---|---|---|---|

|  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|
| <b>Tank capacity</b><br>12 dm <sup>3</sup> = 12  |  |  |  |  |  |  |  |  |
| <b>Type of pump</b><br>10C1X053G = 1<br>10C1,6X053G = 1,6<br>10C2,2X053G = 2,5   |  |  |  |  |  |  |  |  |
| <b>Motor power</b> (according to the table 3)<br>0,37 kW = 0,37<br>0,55 kW = 0,55<br>0,75 kW = 0,75<br>1,1 kW = 1,1  |  |  |  |  |  |  |  |  |
| <b>Nominal size of hydraulic elements mounted</b><br>(referred to connections of directional valves)<br>NS6 = 6  |  |  |  |  |  |  |  |  |
| <b>Designed version</b> <ul style="list-style-type: none"> <li>• standard version (without connection for directional valve) = no designation</li> <li>• with the connection for one directional valve = R1</li> <li>• with the connection for two directional valves (parallel connection of apparatus) = R2</li> <li>• with the connection for three directional valves (parallel connection of apparatus) = R3</li> <li>• with the connection for four directional valves (parallel connection of apparatus) = R4</li> <li>• with the connection for five directional valves (parallel connection of apparatus) = R5</li> <li>• with the connection for six directional valves (parallel connection of apparatus) = R6</li> </ul> |  |  |  |  |  |  |  |  |
| <b>Successive number of power pack version</b><br>(given by the manufacturer of the power pack when order confirmed) = XXXX  |  |  |  |  |  |  |  |  |
| <b>Further requirements in clear text</b><br>(to be agreed with the manufacturer)  |  |  |  |  |  |  |  |  |

Coding example: UHMZ 12-1,6-0,75-6-R3-XXXX

### NOTE:

Type, quantity and placing hydraulic equipment (directional valves, valves and other), must be specified in the hydraulic scheme or in another clear way.

**Below hydraulic equipment manufactured by "PONAR-WADOWICE" S.A.  
that can be used for control systems (table 5)**

|   |               |                         |
|---|---------------|-------------------------|
| Directional spool valve, electrically operated  | <b>WE 6</b>   | according to WK 499 502 |
| Directional spool valve, hydraulically operated | <b>WH 6</b>   | according to WK 420 170 |
| Directional spool valve, hand lever operated    | <b>WMM 6</b>  | according to WK 420 170 |
| Directional spool valve, rotary knob operated   | <b>WMD 6</b>  | according to WK 420 170 |
| Pressure reducing valves, sandwich plate        | <b>UZRC 6</b> | according to WK 493 061 |
| Pressure sequence valves, sandwich plate        | <b>UZKC 6</b> | according to WK 393 060 |
| Check valves, sandwich plate                    | <b>WZZC 6</b> | according to WK 450 355 |
| Double check valves, pilot operated             | <b>ZZS 6</b>  | according to WK 450 360 |
| Double check valves, sandwich plate             | <b>ZZFS 6</b> | according to WK 450 232 |
| Pressure switches (with subplate UŁBC 6)        | <b>USPH 4</b> | according to WK 450 398 |
| Pressure relief valves                          | <b>UZPR 6</b> | according to WK 494 060 |

PONAR Silesia S.A.  
ul. Wojska Polskiego 29  
34-100 Wadowice  
tel. +48 33 823 44 41 - 45  
fax. +48 33 823 39 36  
[www.ponar-silesia.pl](http://www.ponar-silesia.pl)

