

Fully automatic backflushing filter Type ABF 50 - 1000


Housing material:

Carbon steel
Stainless steel SS304, SS316,
SS347 or CuNi 90/10

Filterelement

wedge wire type:

Stainless steel SS304, SS316,
Monel or CuNi 90/10

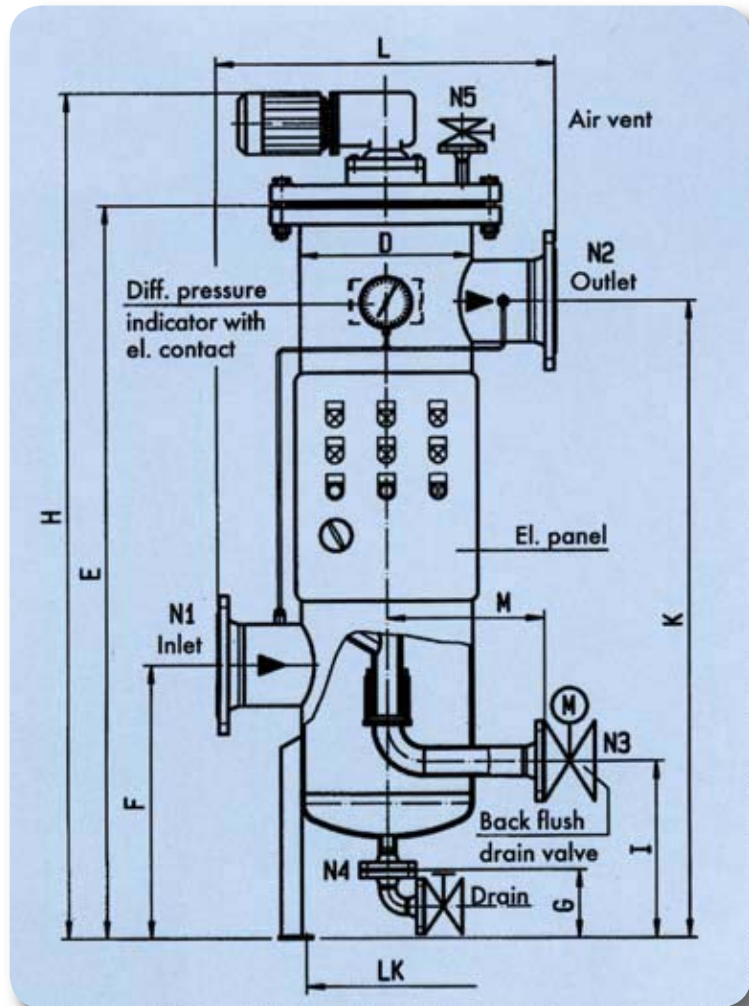

Filter type	Connection max. N1/N2	Connection N3	Connection N4	Filter area m ²	Contents dm ³	Dimensions in mm									
						D	E	F	G	H	I	K	L	M	LK
ABF 50	DN50 /2"	DN25	DN15	0.70	50	219.1	1800	480	200	2050	450	1600	500	230	220
ABF 80	DN80 /3"	DN25	DN15	0.70	50	219.1	1800	480	200	2050	450	1600	500	230	220
ABF 100	DN100 /4"	DN40	DN15	0.90	80	273	1800	510	200	2050	470	1550	600	270	275
ABF 150	DN150 /6"	DN50	DN25	1.70	140	355	1850	550	200	2100	500	1550	700	310	355
ABF 200	DN200 /8"	DN50	DN25	2.15	240	457	1900	600	200	2200	520	1550	850	360	457
ABF 250	DN250 /10"	DN65	DN25	3.15	430	600	1950	660	200	2250	560	1600	1000	430	600
ABF 300	DN300 /12"	DN65	DN25	4.90	580	700	2000	710	200	2300	580	1600	1150	480	700
ABF 400	DN400 /16"	DN100	DN50	7.15	1080	900	2200	860	250	2500	700	1750	1350	590	900
ABF 500	DN500 /20"	DN100	DN50	8.50	1630	1000	2600	910	250	3000	720	2150	1500	640	1000
ABF 700	DN700 /28"	DN125	DN50	14.3	4060	1400	3200	1120	250	3600	820	2600	1850	850	1400
ABF 800	DN800 /32"	DN150	DN50	17.2	5000	1500	3400	1200	250	3800	860	2750	2000	900	1500
ABF 1000	DN1000/40"	DN150	DN50	22.8	8200	1800	3800	1350	250	4200	910	3000	2300	1050	1800