


APPLICATION

Proportional directional valves type USAB 6 are used to control the direction and speed of a user movement. The output flow is proportional to electrical input signal.

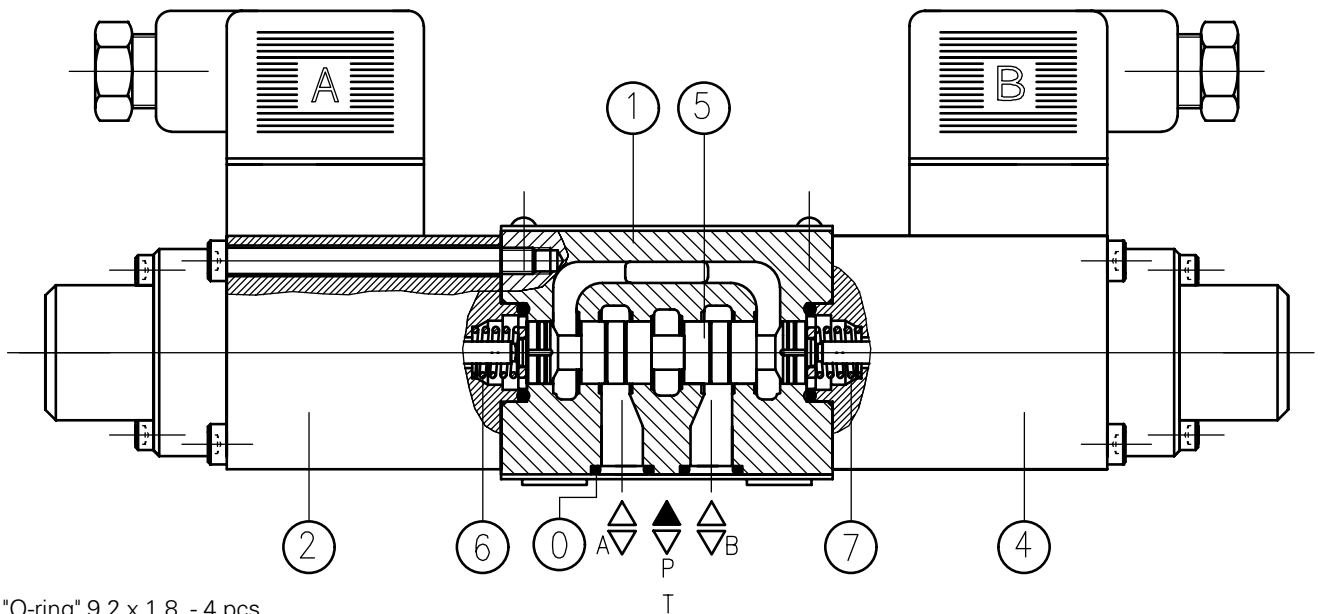

"O-ring" 9,2 x 1,8 - 4 pcs

DESCRIPTION OF OPERATION

Proportional directional valve type USAB 6 comprises mainly the housing 1, solenoids 2 and 4, spool 5, springs 6 and 7.

Electronic regulator (30 RE ...) can be included with the valve.





It is used to control proportional solenoids of the valve.

The proportional solenoid 2 or 4 moves the spool 5 from its neutral position. The neutral position is held by means of the springs 6 and 7. Current flowing through the solenoid 2 or 4 produces force pushing the spool 5 against the springs 6 or 7.

TECHNICAL DATA




Working medium	Mineral oil
Operating pressure at port P, A, B	up to 31,5 MPa
Operating pressure at port T	up to 16 MPa
Required filtration	16 mm
Recommended filtration	10 mm
Nominal fluid viscosity	37 mm ² /s at temp. 328 K
Viscosity range	2,8 to 380 mm ² /s
Working temperature (in tank)	313 to 328 K
Hysteresis	< 6 %
Repetition accuracy	< 3 %
Operating position	optional
3-position valve weight	~ 2,5 kg
2-position valve weight	~ 1,8 kg
Electrical characteristics	
Nominal solenoid power	~ 13 W
Resistance of cold solenoid coil (293K)	5,4W
Resistance of max hot solenoid coil	8,1W
Electronic regulators	30 RE 20 - for USE B6 - 3 and 2-position, data card WK 495 773

OVERALL AND CONNECTION DIMENSIONS

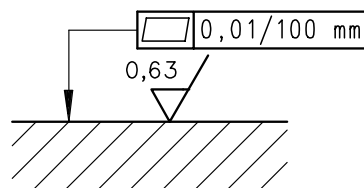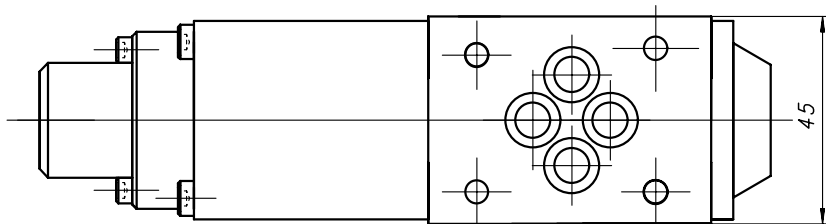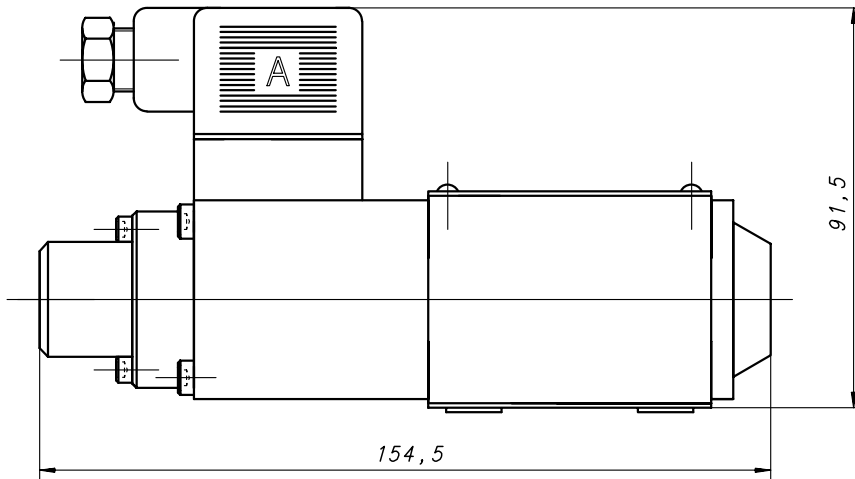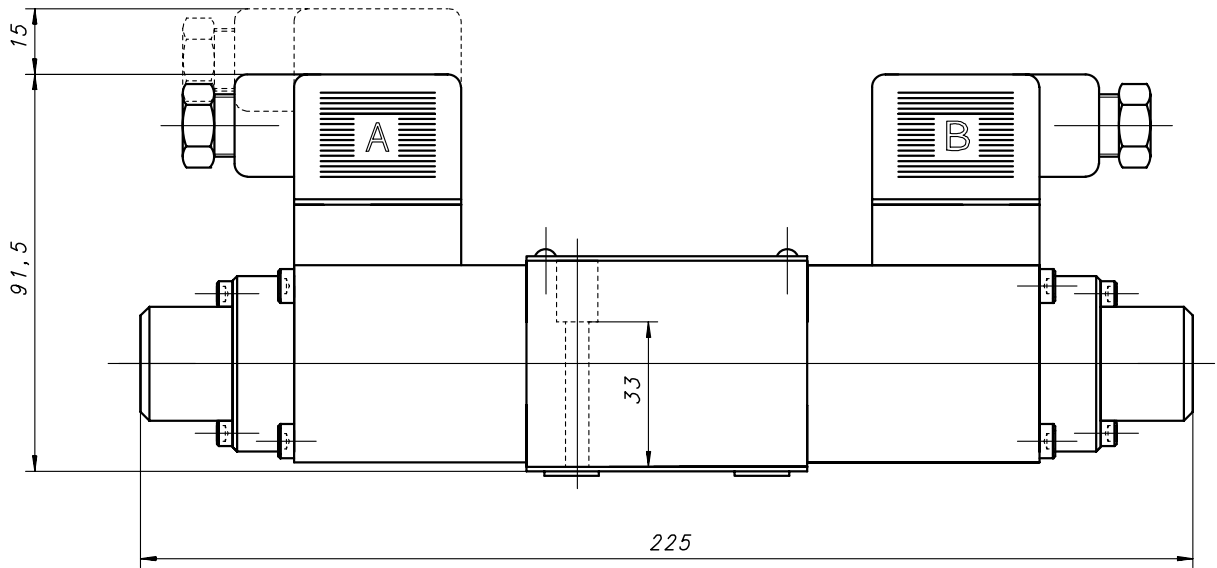





Admissible surface roughness and flatness deviation for a subplate face.

PERFORMANCE CURVES, measured at $v = 41 \text{ mm}^2/\text{s}$ and $T = 323 \text{ K}$

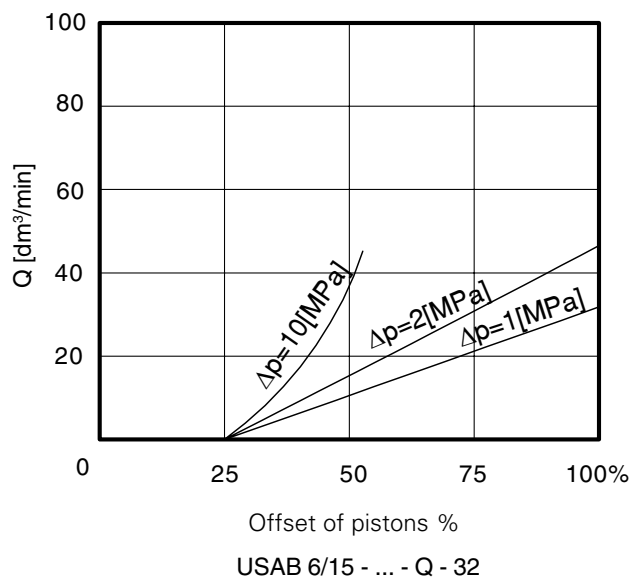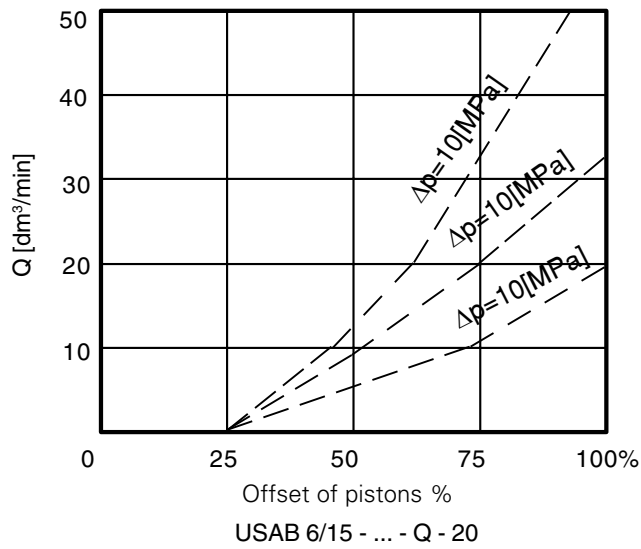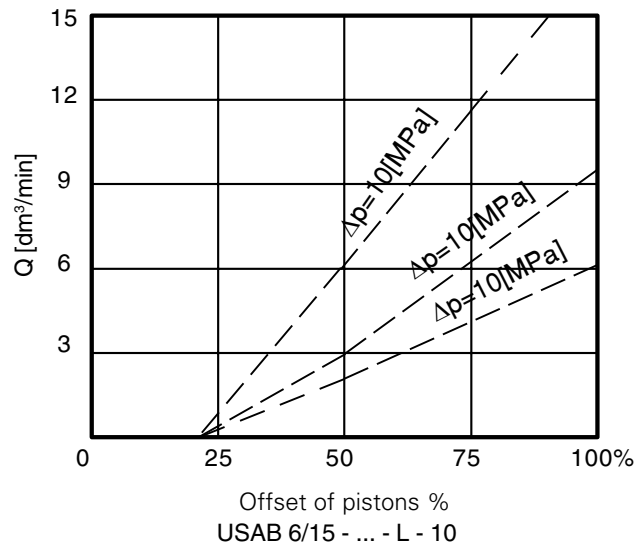

SPOOL SCHEMES

GRAPHICAL SYMBOL

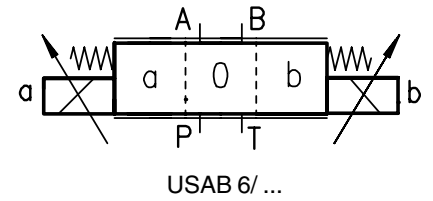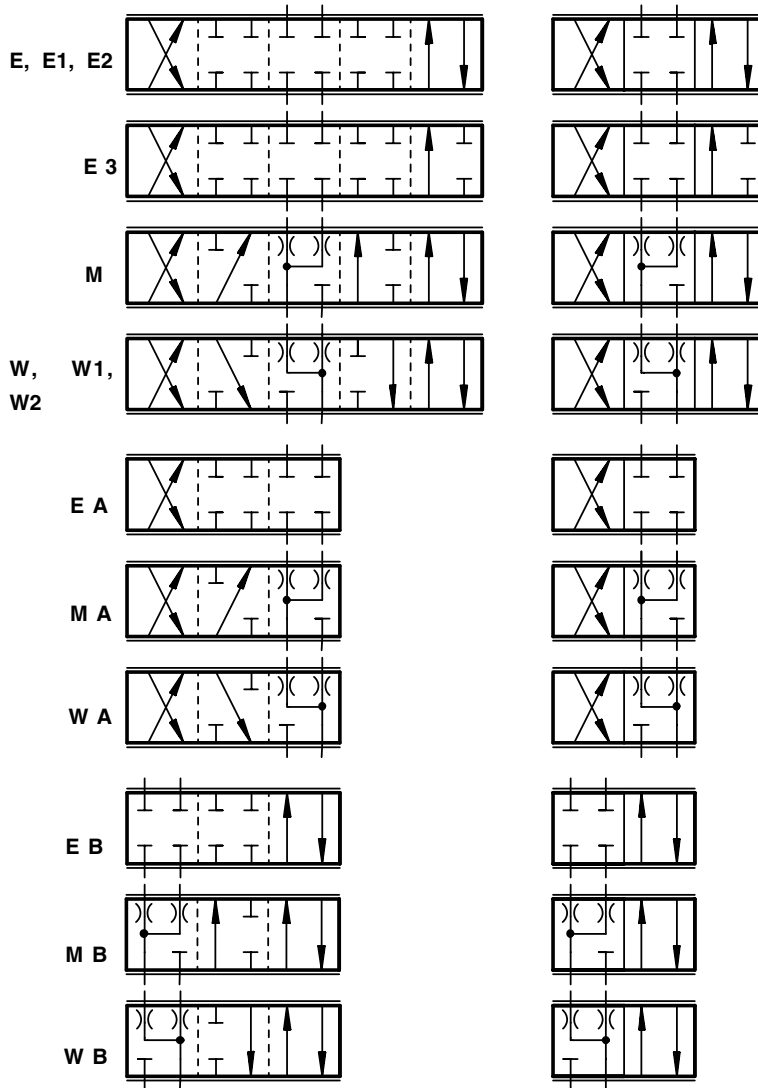

For symbol **E1** i **W1**-:

$P \rightarrow A: Q_{\max}$
 $P \rightarrow B: Q/2$

$B \rightarrow T: Q/2$
 $A \rightarrow T: Q_{\max}$

For symbol **E3** i **W3**-:

$P \rightarrow A: Q_{\max}$
 $P \rightarrow B: Q/2$

$B \rightarrow T: \text{close}$
 $A \rightarrow T: Q_{\max}$

For symbol **E2** i **W2**-:

$P \rightarrow A: Q/2$
 $P \rightarrow B: Q_{\max}$

$B \rightarrow T: Q_{\max}$
 $A \rightarrow T: Q/2$

HOW TO ORDER

Orders coded in the way showed below should be forwarded to the manufacturer.

USAB 6

*

Series number

15 = 15
(15 - 19) - installation and connection dimensions remain unchanged

Designation of connections to schemes on page 3.

Flow changes

Linear (only for 10 dm³/min) = L
Progressive = Q

Nominal flow at Δp 1MPa

10dm³/min = 10
20dm³/min = 20
32dm³/min = 32


Sealing

Fluids on mineral oil base = with no code
Fluids on phosphate-ester base = V

Further requirements in clear text (to be agreed upon with the manufacturer)

Coding example : USAB 6 15 E L 10

Connection dimensions for subplate

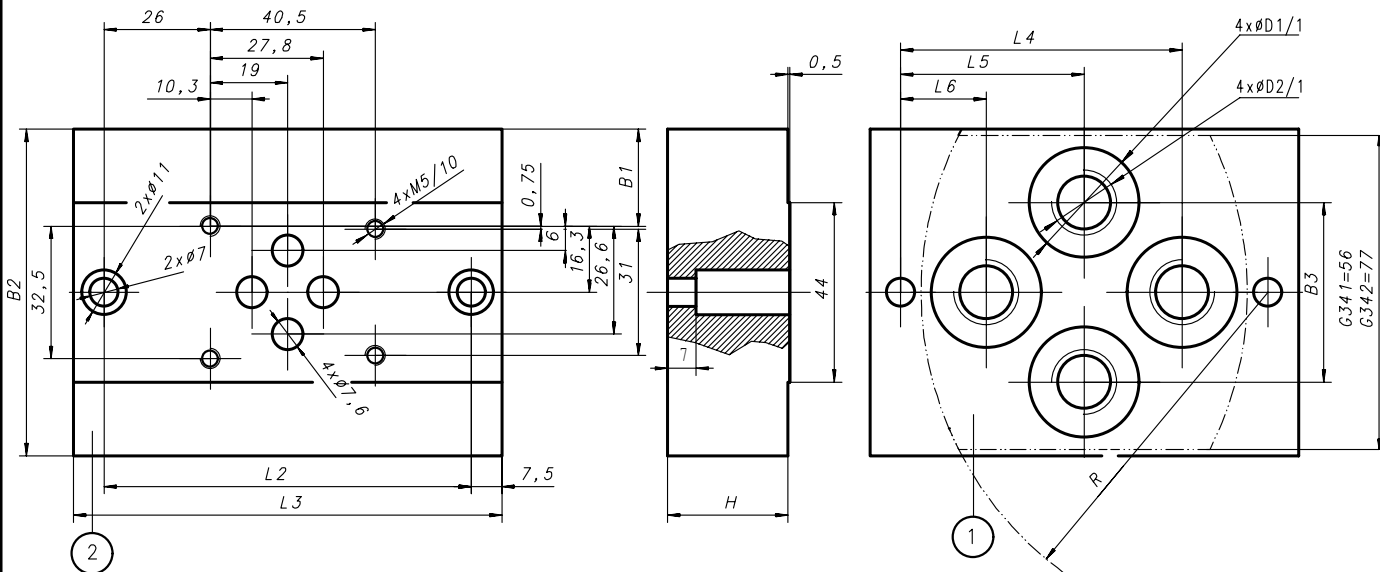

item 1 - recess in subplate face
item 2 - connecting face

Weight ~ 0,8 kg

Fixing the valve to the subplate by means of 4 bolts
M5 × 45 - 10.9 PN-74/M-82302 (DIN 912)
Tightening torque - 9 Nm.
Bolts and subplates have to be ordered separately.

PONAR WADOWICE S.A.
ul. Wojska Polskiego 29
34-100 Wadowice
tel. 033/ 823 39 43, 823 30 41
fax 033/ 873 48 80
e-mail: ponar@ponar-wadowice.pl

PONAR[®]
wadowice